



Features/Applications

GREMARK® PG63 3X is a flat printable, flame retardant, polyolefin heat shrink tubing. GREMARK® PG63 3X offers an excellent solution for cable identification and meets the highest requirements in railway, military and industrial sectors. GREMARK® PG63 3X is suitable for electrical cable insulation and for identifying cables and wires. It is widely used in the railway, automotive, industrial and military sector.

Various


Standard colours: Black, Red, Blue, Green, Yellow, White, Clear.
Special sizes and colours available on request.

Specifications

Railway approved EN 45545-2.
MIL-I-23053/5 Class 1 and 3, 135°C.

Preferred printer / ribbon combination

To be used with the GREMTEK printing system
- Thermal transfer printer type SQUIX 4 (one side) or XDQ4 (double side)
- Thermal transfer ribbon type GR-TT6100

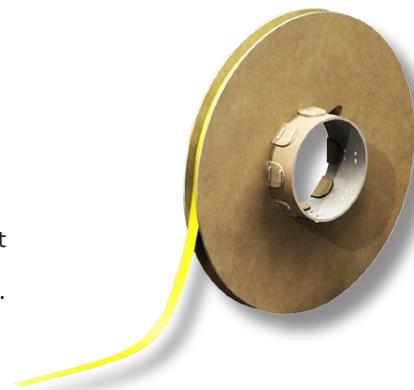

Dimensions



Reference	As supplied (mm)	After recovery (mm)		Standard Length (m)
GREMARK® PG63 3X	Inside Diameter (D)	Inside Diameter (d)	Wall Thickness (t)	Spool
003,0	≥ 3,00	≤ 1,0	0,55 ±0,10	50
004,5	≥ 4,50	≤ 1,5	0,60 ±0,10	50
006,0	≥ 6,00	≤ 2,0	0,65 ±0,10	50
009,0	≥ 9,00	≤ 3,0	0,75 ±0,15	50
012,0	≥ 12,0	≤ 4,0	0,75 ±0,15	50
015,0	≥ 15,0	≤ 5,0	0,80 ±0,15	50
018,0	≥ 18,0	≤ 6,0	0,85 ±0,15	50
024,0	≥ 24,0	≤ 8,0	1,00 ±0,20	50

●Spools as standard, cut pieces available on request

Property

		Values	Test Methods
Physical	Working temperature	-55°C to +135°C	-
	Longitudinal change	±8%	-
	Tensile strength	Unaged	≥ 10,4 MPa
	Elongation at break	Unaged	≥ 200%
	Tensile strength	Aged 168h @ 175°C	≥ 7,3 MPa
	Elongation at break	Aged 168h @ 175°C	≥ 100%
	Heat shock	4h @ 250°C	No cracking
	Cold Blend	1h @ -55°C	No cracking
	Flammability, Smoke & Toxicity	Procedure C	VW-1
			R24 - HL3
Electrical	Dielectric strength	≥ 15 kV/mm	ASTM D 2671
	Dielectric withstand	60s @ 2500V	No Breakdown
	Volume resistivity	≥ 10 ¹⁴ Ω.cm	ASTM D 876
Chemical	Copper stability	168h @ 175°C	Pass
	Anti Corrosion	168h @ 175°C	Pass

Recommended storage conditions: Keep in cool, dry, ventilated storage (maximum temperature of 45°C) and in closed container.

16/03/2023 Rev1

Whilst every attempt is made to provide data that is as accurate as possible the values provided should be treated as a guide only. It remains the responsibility of the user to test the product and determine suitability. GREMTEK shall not be held responsible for any loss or defect resulting from incorrect, improper or inappropriate use of this product.