

Features/Applications

GREMSHIELD® 450PAN5000 is a flexible nonwoven needle-felt made with oxidized fibers. GREMSHIELD® 450PAN5000 offers a very high continuous working temperature higher than +500°C.

GREMSHIELD® 450PAN5000 is suitable for thermal insulation, containment and flame resistance. Used within the automotive sector.

Various

Standard colours: Black.

Dimensions


These parts are tailor-made to each customer's application.

GREMTEK's engineering department has significant application and design expertise.

The designer teams will work with the customer to identify the best design in order to achieve the specified requirements.

The heat shields can be formed and shaped using a variety of methods from hook and loop, to press studs, to sewn solutions.

GREMTEK Results

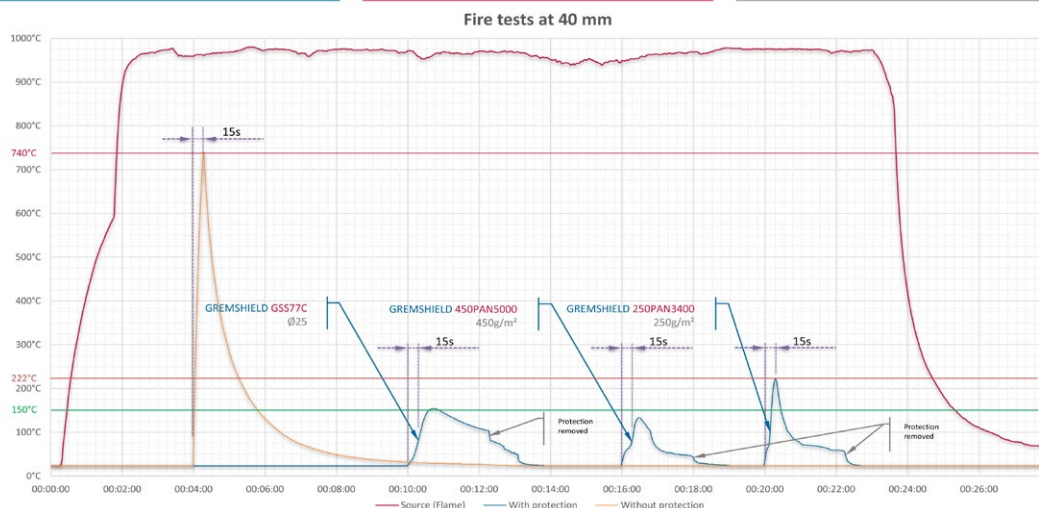

Property	Values	Test Methods
Physical	Working temperature	-40°C to >+500°C
	Nonwoven	Oxidized fibers
	Thickness	5 ± 0,5 mm
	Total weight	450 g/m ²
	Flammability	M1
Chemical	Fluid resistance	No degradation
		D45 1333 / FMVSS302



17/112022 Rev0

Whilst every attempt is made to provide data that is as accurate as possible the values provided should be treated as a guide only. It remains the responsibility of the user to test the product and determine suitability. GREMTEK shall not be held responsible for any loss or defect resulting from incorrect, improper or inappropriate use of this product.