

## Features/Applications

GREMSHIELD® WAFPA is a flexible self-wrapping sleeve made of fiberglass and Polyester monofilament covered with an aluminum foil.

GREMSHIELD® WAFPA offers a continuous working temperature of -40°C up to +200°C. Its overlapping sides and a self sealing adhesive reinforcement allow for permanent and seamless closure. Its smooth and reflective outer surface provides a highly effective barrier to radiant heat. GREMSHIELD® WAFPA is suitable for the protection of cable assemblies, hoses and pipes from a heat source. Used within the automotive sector.


## Various

Standard colours: Reflective aluminum.

## Dimensions

Reference <i>GREMSHIELD® WAFPA</i>	Recommended range of use (mm)
008,0	06 to 09
010,0	09 to 11
013,0	11 to 15
016,0	14 to 18
020,0	17 to 22
025,0	22 to 28
032,0	28 to 36
038,0	34 to 42

## Heat reduction

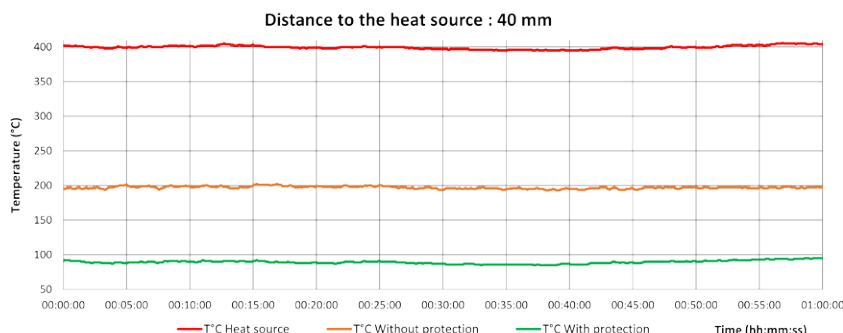


## Cutting

GREMSHIELD® WAFPA can be cut to length.

## Packaging

Available in spool, coils or cut pieces (on request).  
Other packaging or diameter available upon request.



Sleeve Shape

Property	Values	Test Methods
<b>Physical</b>		
Working temperature	-40°C to +200°C	-
Thermal endurance - Radiation 1h @ 400°C	No delamination	40mm above radiant heat source
Thermal endurance - Aging	No delamination	1000h @ 200°C
Flammability	Self extinguishing Type B	FMVSS 302 D45 1333
<b>Chemical</b>		
Fluid resistance	No delamination	D47 1924



01/09/2022 Rev5

Whilst every attempt is made to provide data that is as accurate as possible the values provided should be treated as a guide only. It remains the responsibility of the user to test the product and determine suitability. GREMTEK shall not be held responsible for any loss or defect resulting from incorrect, improper or inappropriate use of this product.