

Features/Applications

GREMARK® GMEC 3X is a printable, flame retardant polyolefin heat shrink tubing in a ladder format. GREMARK® GMEC 3X offers an excellent solution for cable identification. GREMARK® GMEC 3X is suitable for identifying cables and wires in electrical cabinets, cable harness assemblies.

Various

Standard colours: White, yellow.
Other colours available on request.

Specifications

Railway approved EN 45545-2 R22-R23.

Preferred printer / ribbon combination


- To be used with the GREMTEK printing system
- Thermal transfer printer type SQUIX 4 (one side) or XD4 (double side)
- Thermal transfer ribbon type GR-TT6100

Dimensions



Reference	As supplied (mm)	After recovery (mm)		Packaging (Sleeve/spool)
GREMARK® GMEC 3X	Inside Diameter Min. (D)	Inside Diameter Max. (d)	Wall Thickness Min. (t)	
0024-25-0-9	2,4	0,8	0,51	2500
0032-25-0-9	3,2	1,0	0,55	2500
0048-20-0-9	4,8	1,6	0,61	2000
0064-20-0-9	6,4	2,4	0,65	2000
0095-20-0-9	9,5	3,2	0,71	2000
0127-10-0-9	12,7	4,8	0,73	1000
0191-10-0-9	19,1	6,4	0,77	1000
0254-5-0-9	25,4	8,5	0,79	500
0381-5-0-9	38,1	12,7	0,82	500
0508-2,5-0-9	50,8	17,0	0,82	250
0762-2,5-0-9	76,2	25,4	0,83	250

• Spools as standard, marked pieces available on request

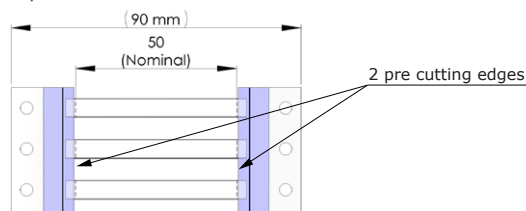


Options

Pre-scoring	0 (by default)	1	2	3
Printable area size	1 x 50mm	2 x 25mm	3 x 16mm	4 x 12,5mm
Colour code	4		9	
Standard colour	Yellow		White	

• As a standard GREMARK® is delivered with 2 pre cutting edges.

Part numbering system

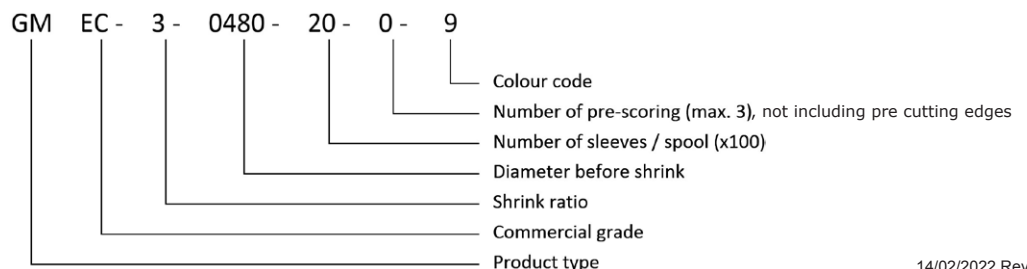

Recommended storage conditions: Keep in cool, dry, ventilated storage (maximum temperature of 50°C) and in closed containers.

