



Features/Applications

GREMARK® GMDR 3X is a printable, flame retardant, diesel resistant polyolefin heat shrink tubing in a ladder format. GREMARK® GMDR 3X offers an excellent solution for cable identification and meets the highest requirements in railway, military and industrial sectors. GREMARK® GMDR 3X is suitable for electrical cable insulation and for identifying cables and wires. It is widely used in the railway, automotive, industrial and military sector.

Various

Standard colours: Yellow. Other colours available on request.
For heat shrink tubing characteristics please refer to GREMARK® PGDR 3X.

Specifications

Railway approved NF F 00-608, EN 45545-2 R24 & EN 50343.
Meets ASTM, SAE-AMS-DTL-23053/6 class 1.

Preferred printer / ribbon combination


- To be used with the GREMTEK printing system
- Thermal transfer printer type SQUIX 4 (one side) or XD4/XDQ4 (double side)
- Thermal transfer ribbon type GR-TT6900

Dimensions



Reference	As supplied (mm)		After recovery (mm)		Packaging (Sleeve/spool)
	Inside Diameter Min. (D)	Inside Diameter Max. (d)	Inside Diameter Min. (D)	Wall Thickness Min. (t)	
GREMARK® GMDR 3X					
0024-25-0-4	2,7	0,8	0,55	2500	
0032-20-0-4	3,5	1,1	0,55	2000	
0048-20-0-4	5,1	1,6	0,64	2000	
0064-20-0-4	6,8	2,4	0,69	2000	
0095-10-0-4	10,0	3,2	0,74	1000	
0127-10-0-4	13,2	4,8	0,77	1000	
0191-5-0-4	19,7	6,4	0,83	500	
0254-5-0-4	26,1	8,5	0,83	500	
0381-5-0-4	39,2	12,9	0,88	500	
0508-2,5-0-4	52,1	17,2	0,87	250	
0762-2,5-0-4	78,3	25,8	0,94	250	

• Spools as standard, marked pieces available on request

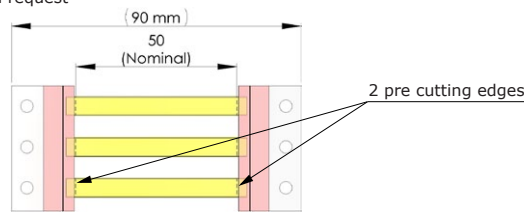


Options

Pre-scoring	0 (by default)	1	2	3
Printable area size	1 x 50mm	2 x 25mm	3 x 16mm	4 x 12,5mm
Colour code	4		9	
Standard colour	Yellow		White	

• As a standard GREMARK® is delivered with 2 pre cutting edges.

Part numbering system

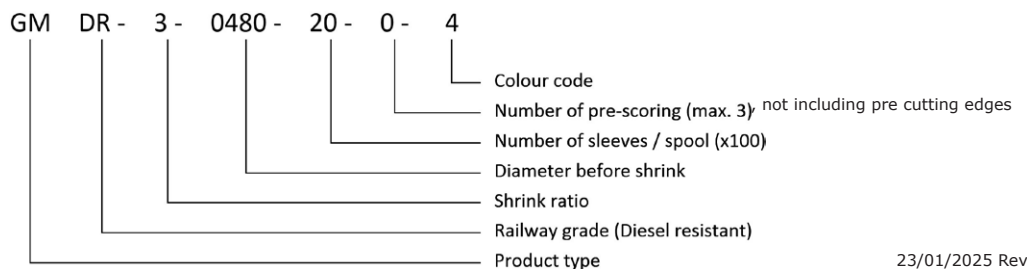

Recommended storage conditions: Keep in cool, dry, ventilated storage (maximum temperature of 50°C) and in closed containers.

