


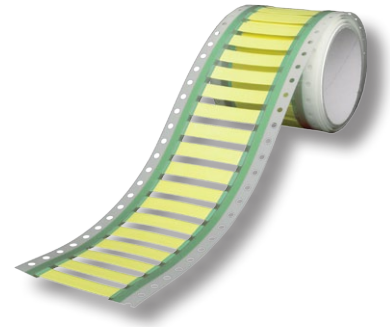

Features/Applications

GREMARK® GMDRZ 3X is a printable, halogen free, flame retardant, diesel resistant Polyolefin heat shrink tubing in a ladder format.
GREMARK® GMDRZ 3X offers an excellent solution for cable identification and meets the highest requirements in railway, military and industrial sectors.
GREMARK® GMDRZ 3X is suitable for electrical cable insulation and for identifying cables and wires. It is widely used in the railway, automotive, industrial and military sector.

Various

Standard colours: Yellow. Other colours available on request.

Specifications

Railway approved EN 45545-2 R22 & EN 50343.
Meets MIL-STD-202F / 215J.

Preferred printer / ribbon combination


- To be used with the GREMTEK printing system
- Thermal transfer printer type SQUIX 4 (one side) or XDQ4 (double side)
- Thermal transfer ribbon type GR-TT6900

Dimensions



Reference	As supplied (mm)	After recovery (mm)		Packaging (Sleeve/spool)
GREMARK® GMDRZ 3X	Inside Diameter Min. (D)	Inside Diameter Max. (d)	Wall Thickness Min. (t)	
0024-25-0-4	2,4	0,86	0,51	2500
0032-25-0-4	3,2	1,10	0,51	2500
0048-20-0-4	4,8	1,70	0,60	2000
0064-20-0-4	6,4	2,36	0,65	2000
0095-10-0-4	9,5	3,18	0,70	1000
00127-10-0-4	12,7	4,75	0,73	1000
00190-5-0-4	19,1	6,35	0,79	500
00250-5-0-4	25,4	8,47	0,79	500
00380-2,5-0-4	38,1	12,90	0,82	250
00510-2,5-0-4	50,8	17,20	0,83	250
00760-2,5-0-4	76,2	25,80	0,90	250

• Spools as standard, marked pieces available on request

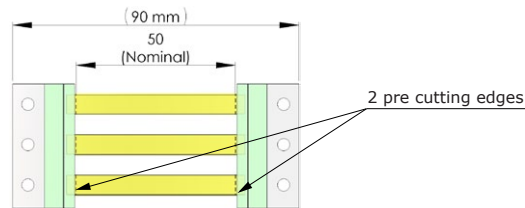


Options

Pre-scoring	0 (by default)	1	2	3
Printable area size	1 x 50mm	2 x 25mm	3 x 16mm	4 x 12,5mm
Colour code	4		9	
Standard colour	Yellow		White	

• As a standard GREMARK® is delivered with 2 pre cutting edges.

Part numbering system

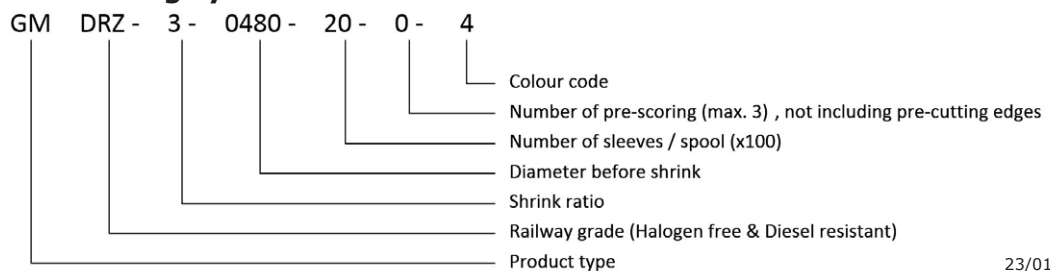

Recommended storage conditions: Keep in cool, dry, ventilated storage (maximum temperature of 35°C) and in closed container.