

Features/Applications

GREMARK® GMEC is a printable, flame retardant polyolefin heat shrink tubing in a ladder format. GREMARK® GMEC offers an excellent solution for cable identification. GREMARK® GMEC is suitable for identifying cables and wires in electrical cabinets, cable harness assemblies.

Various

Standard colours: White, yellow.
Other colours available on request.

Specifications

Railway approved EN 45545-2 R22-R23.

Preferred printer / ribbon combination


- To be used with the GREMTEK printing system
- Thermal transfer printer type SQUIX 4 (one side) or XD4 (double side)
- Thermal transfer ribbon type GR-TT6100

Dimensions



Reference <i>GREMARK® GMEC</i>	As supplied (mm)	After recovery (mm)		Packaging (Sleeve/spool)
	Inside Diameter Min. (D)	Inside Diameter Max. (d)	Wall Thickness Min. (t)	
0024-25-0-9	2,4	1,2	0,43	2500
0032-25-0-9	3,2	1,6	0,45	2500
0048-20-0-9	4,8	2,4	0,48	2000
0064-20-0-9	6,4	3,2	0,50	2000
0095-20-0-9	9,5	4,8	0,53	2000
0127-10-0-9	12,7	6,4	0,53	1000
0191-10-0-9	19,1	9,5	0,55	1000
0254-5-0-9	25,4	12,7	0,56	500
0381-5-0-9	38,1	19,1	0,57	500
0508-2,5-0-9	50,8	25,4	0,56	250
0762-2,5-0-9	76,2	38,1	0,55	250

• Spools as standard, marked pieces available on request

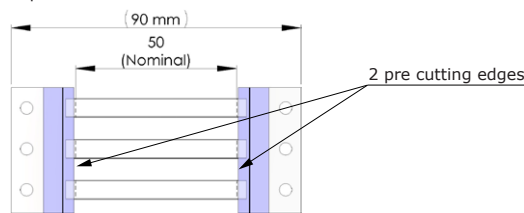


Options

Pre-scoring	0 (by default)	1	2	3
Printable area size	1 x 50mm	2 x 25mm	3 x 16mm	4 x 12,5mm
Colour code	4		9	
Standard colour	Yellow		White	

• As a standard GREMARK® is delivered with 2 pre cutting edges.

Part numbering system

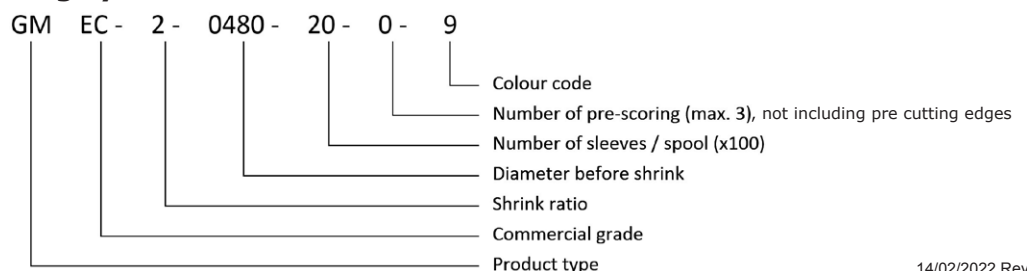

Recommended storage conditions: Keep in cool, dry, ventilated storage (maximum temperature of 50°C) and in closed containers.

