

### Features/Applications


GREMFLEX® PET-SZ is a self extinguishing, halogen free, Polyester 0,22mm monofilament and multifilament, expandable braided sleeve.

GREMFLEX® PET-SZ offers a continuous working temperature of -50°C up to +150°C, good acoustic dampening properties and a good expansion rate.

GREMFLEX® PET-SZ is suitable for the protection of wires and cables harnesses within the automotive sector where noise reduction is required.

### Various

Standard colours: Black.

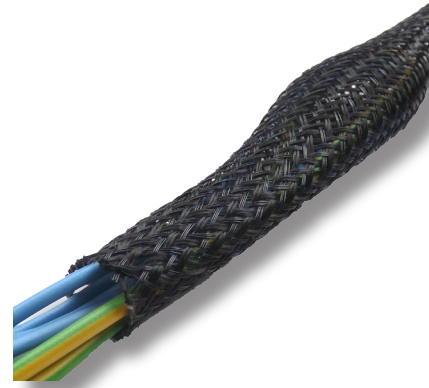

### Dimensions

Reference GREMFLEX® PET-SZ	Recommended range of use (mm)
003,0	01 to 03
004,0	02 to 07
006,0	04 to 10
009,0	06 to 15
012,0	08 to 19
015,0	10 to 23
020,0	13 to 28
030,0	20 to 38
040,0	30 to 48
050,0	40 to 58

### Cutting

GREMFLEX® PET-SZ can be cut to length.

### Packaging

Available in spool, coils or cut pieces (on request).  
Other packaging or diameter available upon request.

Property	Values	Test Methods	
<b>Physical</b>	Working temperature	-50°C to +150°C	
	Peak temperature	+175°C	
	Melting point	+250°C	
		Self extinguishing	FMVSS 302
	Flammability	Type B	D45 1333
		V-2	UL94 on compound
Smoke toxicity	Halogen free	-	
<b>Chemical</b>	Fluid resistance	Unaffected by most chemicals	
		D47 1924	



18/05/2015 Rev2

Whilst every attempt is made to provide data that is as accurate as possible the values provided should be treated as a guide only. It remains the responsibility of the user to test the product and determine suitability. GREMTEK shall not be held responsible for any loss or defect resulting from incorrect, improper or inappropriate use of this product.

**GREMTEK SAS**  
58 rue du Fossé Blanc, 92230 Gennevilliers, France  
Phone: +33 (0)1 41 47 35 70, Fax: +33 (0)1 41 47 35 98  
E-mail: contact@gremtek.com [www.gremtek.fr](http://www.gremtek.fr)

**GREMTEK UK**  
PO Box 13615, Bromsgrove, B60 9DD, UK  
Phone: +44 (0)1 527 836 111, Fax: +44 (0)1 527 836 601  
E-mail: marston@gremtek.com [www.gremtek.com](http://www.gremtek.com)

**GREMTEK GmbH**  
R.Bosch-Str. 20-24, 25451 Quickborn, Germany  
Phone: +49 (0)41 06 61 81 80, Fax: +49 (0)41 06 61 24 17  
E-mail: kontakt@gremtek.com [www.gremtek.de](http://www.gremtek.de)